




Innovation and Experience at Work

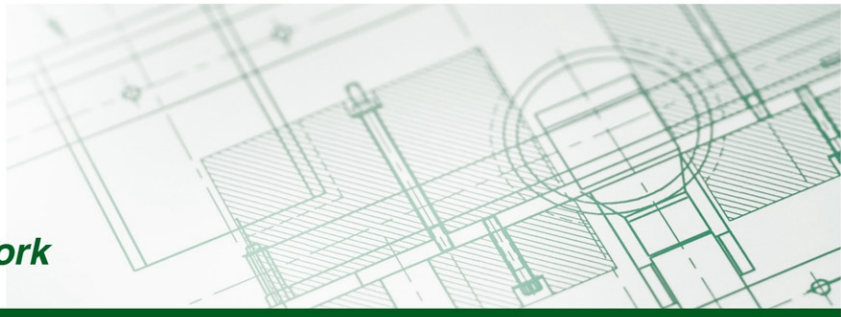

Friction Fighter 1308

Friction Fighter 1308 is a powdered polytetrafluoroethylene dry lubricant with a UV-response dye added. Under ultraviolet lighting, this product will illuminate for easy verification of proper application. This product is insoluble in all solvents and will not lump or agglomerate. Its very low coefficient of friction and self-lubricating characteristics make this an excellent additive to a variety of media including general-purpose engineered plastics, waxes, paints, coatings, grease and oil.

CHARACTERISTICS	TYPICAL VALUE *
Temperature Service Range (°C)	-60 to 200
Color	White with UV Response
UV Response Color	Blue-Green
Appearance	Free-flowing Powder
Bulk Density	600-850

Engineered Custom Lubricants ISO/TS16949:2009 • Registered QMS
3851 Exchange Ave. • Aurora, IL 60504 • T: 630.449.5000 • F: 630.585.0050 • E: customerservice@ecllube.com • www.ecllube.com

DISCLAIMER: Since we cannot anticipate or control the many different conditions under which this information and our product may be used, we cannot guarantee the applicability of this information or the suitability of our product in any individual situation. For the same reason, the product discussed is sold without warranty expressed or implied. Please contact Engineered Custom Lubricants for assistance and recommendations prior to writing or releasing any engineering specifications. ECLI Products, LLC, owns and does business as Engineered Custom Lubricants and Lubrication Technology.