




A QUAKER CHEMICAL COMPANY

*Innovation and Experience at Work*

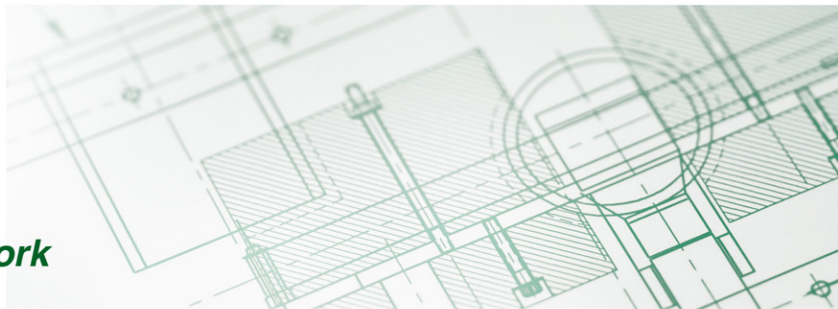

## ViscoTech 1407M

ViscoTech 1407M is an all-purpose mineral grease thickened with lithium soap. The medium viscosity base oil provides good wear resistance and good cold temperature capabilities. This grease is fortified with additives to help it stay in place and possess low oil separation characteristics. Ideally suited for plastic and metal gear systems.

BASE OIL CHARACTERISTICS		TYPICAL VALUE *
<b>Type</b>		Mineral
<b>Temperature Service Range (°C)</b>		-30 to 100
GREASE CHARACTERISTICS		TYPICAL VALUE *
<b>Thickener</b>		Lithium
<b>Color</b>		Brown
<b>Appearance</b>		Smooth
<b>NLGI Grade</b>		2.5
<b>Penetration</b> (ASTM D217 / DIN 51804-T1)	Unworked	250-280
	Worked	60X 250-280
<b>Dropping Point (°C)</b> (ASTM D2265 / DIN ISO 2176)		190 min.
<b>Oil Separation</b> (ASTM D6184)	24h at 100°C	0.5% max.
<b>Evaporation</b> (CTM-1)	24h at 100°C	1% max.
<b>Water Washout</b> (ASTM D1264 / DIN 51807-T2)	60 min at 79°C	5% max.
<b>Copper Corrosion</b> (ASTM D4048 / DIN 51811)	24h at 100°C	1b
<b>Oxidation Stability</b> (ASTM D942)	100h at 99°C	2 psi
<b>Specific Gravity</b> (CTM-2)	25°C	0.931

**Engineered Custom Lubricants**

ISO/TS16949:2009 • Registered QMS

3851 Exchange Ave. • Aurora, IL 60504 • T: 630.449.5000 • F: 630.585.0050 • E: customerservice@ecllube.com • www.ecllube.com

DISCLAIMER: Since we cannot anticipate or control the many different conditions under which this information and our product may be used, we cannot guarantee the applicability of this information or the suitability of our product in any individual situation. For the same reason, the product discussed is sold without warranty expressed or implied. Please contact Engineered Custom Lubricants for assistance and recommendations prior to writing or releasing any engineering specifications. Engineered Custom Lubricants and ECL are assumed names of ECL Products, LLC, d.b.a. Engineered Custom Lubricants.